





REV.	SCN NO.	REVISIONS	BY	DATE	APVD.
01		PRELIMINARY RELEASE	MGD	09/18/13	

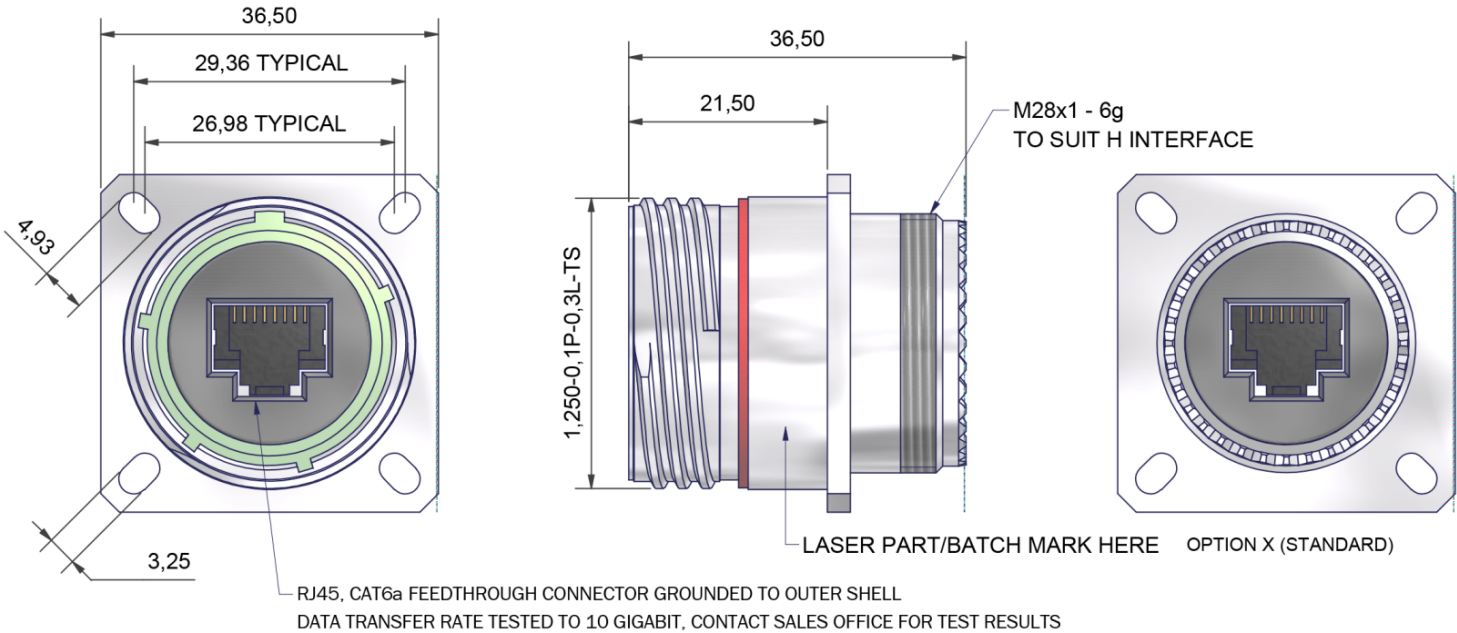


OPTION W



OPTION Y



OPTION Z

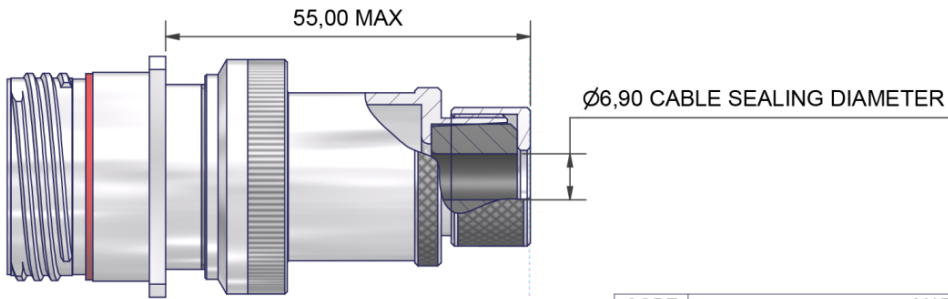

005 CABLE SEALING BACKSHELL OPTION

CODE	MATERIAL / PLATING
1-C	ALUMINIUM / ELECTROLESS NICKEL
1-B	ALUMINIUM / CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL
1-ZB	ALUMINIUM / ZINC COBALT OLIVE DRAB OVER ELECTROLESS NICKEL
4-J	STAINLESS STEEL / PASSIVATE
2-Z	NICKEL ALUMINIUM BRONZE / SHOT BLAST

LIST NOT EXHAUSTIVE, FOR COMPREHENSIVE LIST AND SPECS, SEE WEBSITE

NOTES
GENERALLY TO THE REQUIREMENTS OF MIL-DTL-38999
MATES WITH AMPHENOL RJFTV

FINISH
SEE TABLE
MATERIALS
RJ45
CONTACTS COPPER WITH SELECTIVE GOLD PLATE
SHIELDING - NICKEL PLATED BRASS
BODY - PA, UL94V-0
PCB - FR4, UL94V-0

SEAL - SILICONE ELASTOMER
INSULATOR - PPS GL40 UL94, COLOUR BLACK
POTTING - QSIL 550 UL94V-0

PERFORMANCE
VOLTAGE RATING 50V DC / 35V AC
TEMPERATURE -40°C TO +120°C

ST4B0029-19NX-1-C(-005)

SERIES
SHELL SIZE
KEY ARRANGEMENT (N, A, B, C, D, E)
INSERT ROTATION (W, X, Y, Z)
MATERIAL (SEE TABLE)
PLATING (SEE TABLE)
CABLE SEALING BACKSHELL OPTION
PART NUMBER FOR UNGROUNDED VERSION: ST4B0029-19NX-1-C-U

TOLERANCES		DRAWN BY	DATE
.0		M. DECARLO	09/18/13
.00		CHECKED BY	DATE
.000			
.0000		APPROVED BY	DATE
ANGLES			
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS. ALL DIMENSIONS APPLY AFTER PLATING.			
THIRD ANGLE PROJECTION			
PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF STRAN TECHNOLOGIES AND IS DELIVERED ON THE EXPRESSED CONDITIONS THAT IT IS NOT TO BE DISCLOSED OR REPRODUCED IN WHOLE OR PART, OR USED FOR MANUFACTURING FOR ANYONE OTHER THAN STRAN TECHNOLOGIES WITHOUT ITS WRITTEN CONSENT AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.			



CONN. ASS'Y,
CAT6a RJ45
FEEDTHROUGH,
FLANGEMOUNT RECEPT.

DWG. SIZE	PART NO.	REV.
B	900-0601	01