
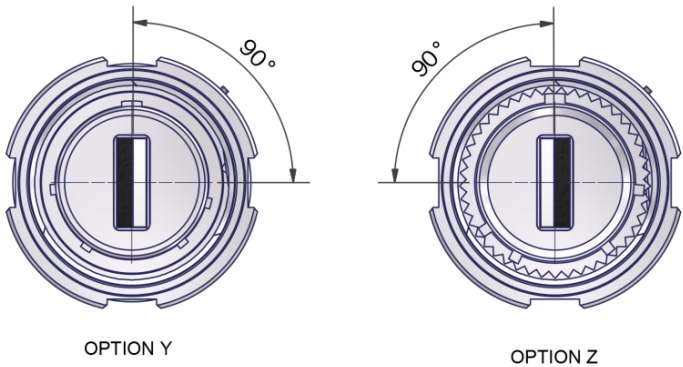


REV.	SCN NO.	REVISIONS	BY	DATE	APVD.
01		PRELIMINARY RELEASE	MGD	09/18/13	

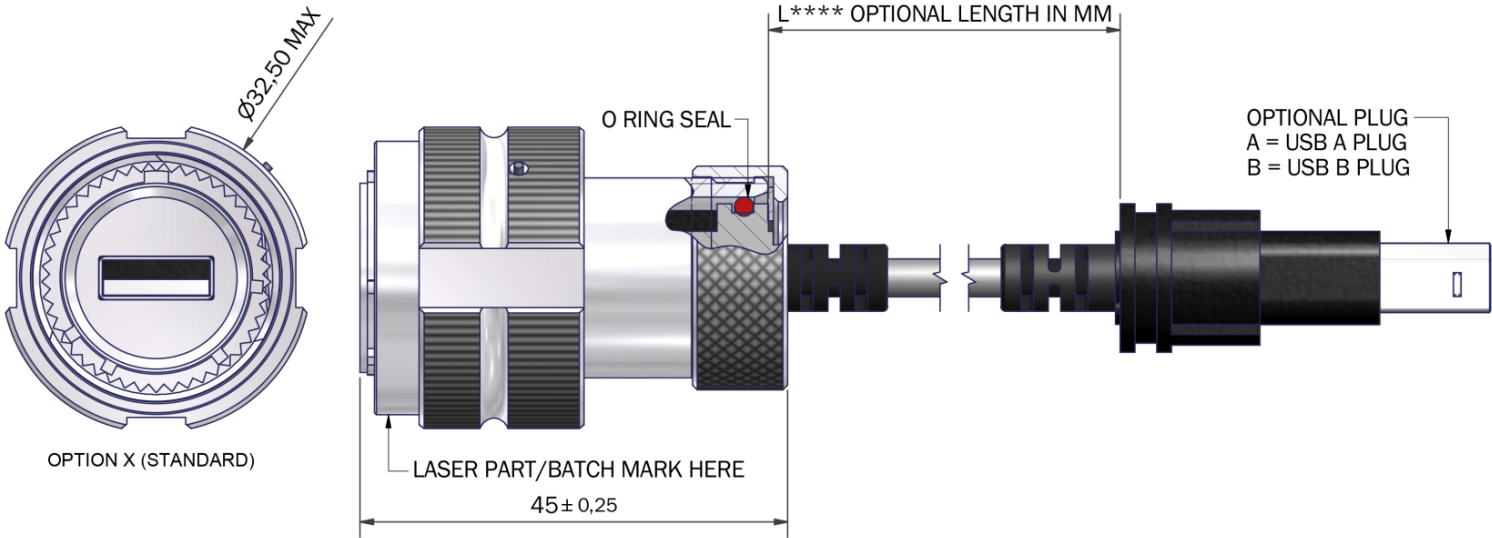

CODE	MATERIAL / PLATING
1-C	ALUMINIUM / ELECTROLESS NICKEL
1-B	ALUMINIUM / CADMIUM OLIVE DRAB OVER ELECTROLESS NICKEL
1-ZB	ALUMINIUM / ZINC COBALT OLIVE DRAB OVER ELECTROLESS NICKEL
4-J	STAINLESS STEEL / PASSIVATE
2-Z	NICKEL ALUMINIUM BRONZE / SHOT BLAST

LIST NOT EXHAUSTIVE, FOR COMPREHENSIVE LIST AND SPECS, SEE WEBSITE

NOTES  
GENERALLY TO THE REQUIREMENTS OF MIL-DTL-38999  
MATES WITH AMPHENOL USBFTV

FINISH  
SEE TABLE

SEAL MATERIAL - SILICONE ELASTOMER

PERFORMANCE  
CURRENT RATING 1 AMP MAX PER CONTACT  
VOLTAGE RATING 30V AC MAX  
TEMPERATURE -40°C TO +105°C

ST4D0021-15NX-1-C-L2000-B

SERIES  
SHELL SIZE  
KEY ARRANGEMENT (N, A, B, C, D, E)  
USB PLUG ROTATION (X, Y, Z)  
MATERIAL (SEE TABLE)  
PLATING (SEE TABLE)  
CABLE LENGTH IN MM (1, 2, 3 AND 5 METRE OPTIONS)  
CABLE END OPTION USB A OR B

TOLERANCES	DRAWN BY	DATE
.0	M. DECARLO	09/18/13
.00	CHECKED BY	DATE
.000		
.0000	APPROVED BY	DATE
ANGLES		
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS. ALL DIMENSIONS APPLY AFTER PLATING.		
THIRD ANGLE PROJECTION		



TITLE
CONN. ASS'Y, USB A CABLED PLUG
DWG. SIZE
PART NO.
REV.